

SVETRUCK®

True Quality

SVETRUCK TMF 28/21 LOGSTACKER



Strength and efficiency in perfect harmony.

The Svetruck TMF is a powerful log stacker, which despite its size is easy to operate and easy to service. The machine has been designed to provide the operator with a good work environment that promotes high production capacity. The overall objective has been for operators to work safely and efficiently throughout the full shift.

The Svetruck TMF is built using well-known quality components and combined with many years of experience and vast know-how, this has resulted in a heavy-duty, highly reliable machine for fast, safe and cost-effective log handling.

► *The Svetruck TMF is the world leader in efficient log handling*



► Optimized log grapple

Grapple sizes available in sizes from 6.0 to 8.2 m². 360° rotation and uncompromised precision during longitudinal turning.

► Comfortable operator environment

A workplace that guarantees the operator a good day at work. Smooth control of all functions, optimum visibility of the working area. EHC controls as standard.

► **Tailored to your work needs**

Upon request, Svetruck can adapt machines to perfectly suit the workplace. The Svetruck TMF machines operate at sawmills, paper mills and in pulp industry settings.




Log pusher

► **Easy access**

The Svetruck TMF is a service-friendly machine with large engine compartment hatches and full access to the reversible hydrostatic fan. Optional boom-mounted service platform.



Engine

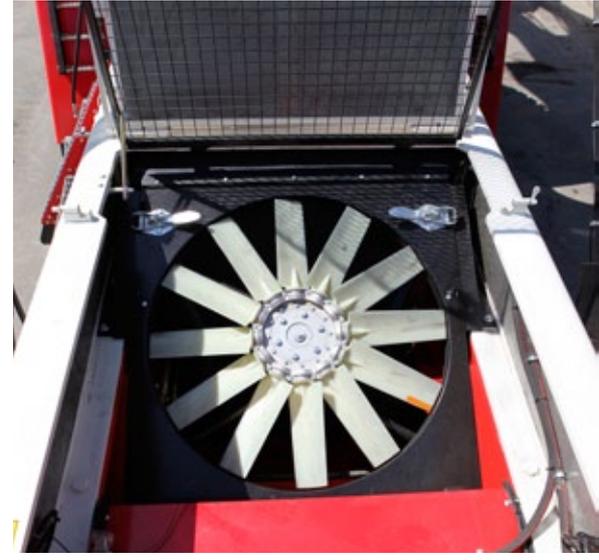

Reversible hydrostatic fan

► **Svetruck D5**


As standard the Svetruck TMF features Svetruck D5 that constitutes a complete control and monitoring system to provide the operator with a full machine status overview.

► **True Quality**

The Svetruck TMF is built using innovative and well-known components. It has been designed and manufactured in our plant in Ljungby, Sweden, relying on over 30 years of truck building experience.



Svetruck TMF 28/2 I

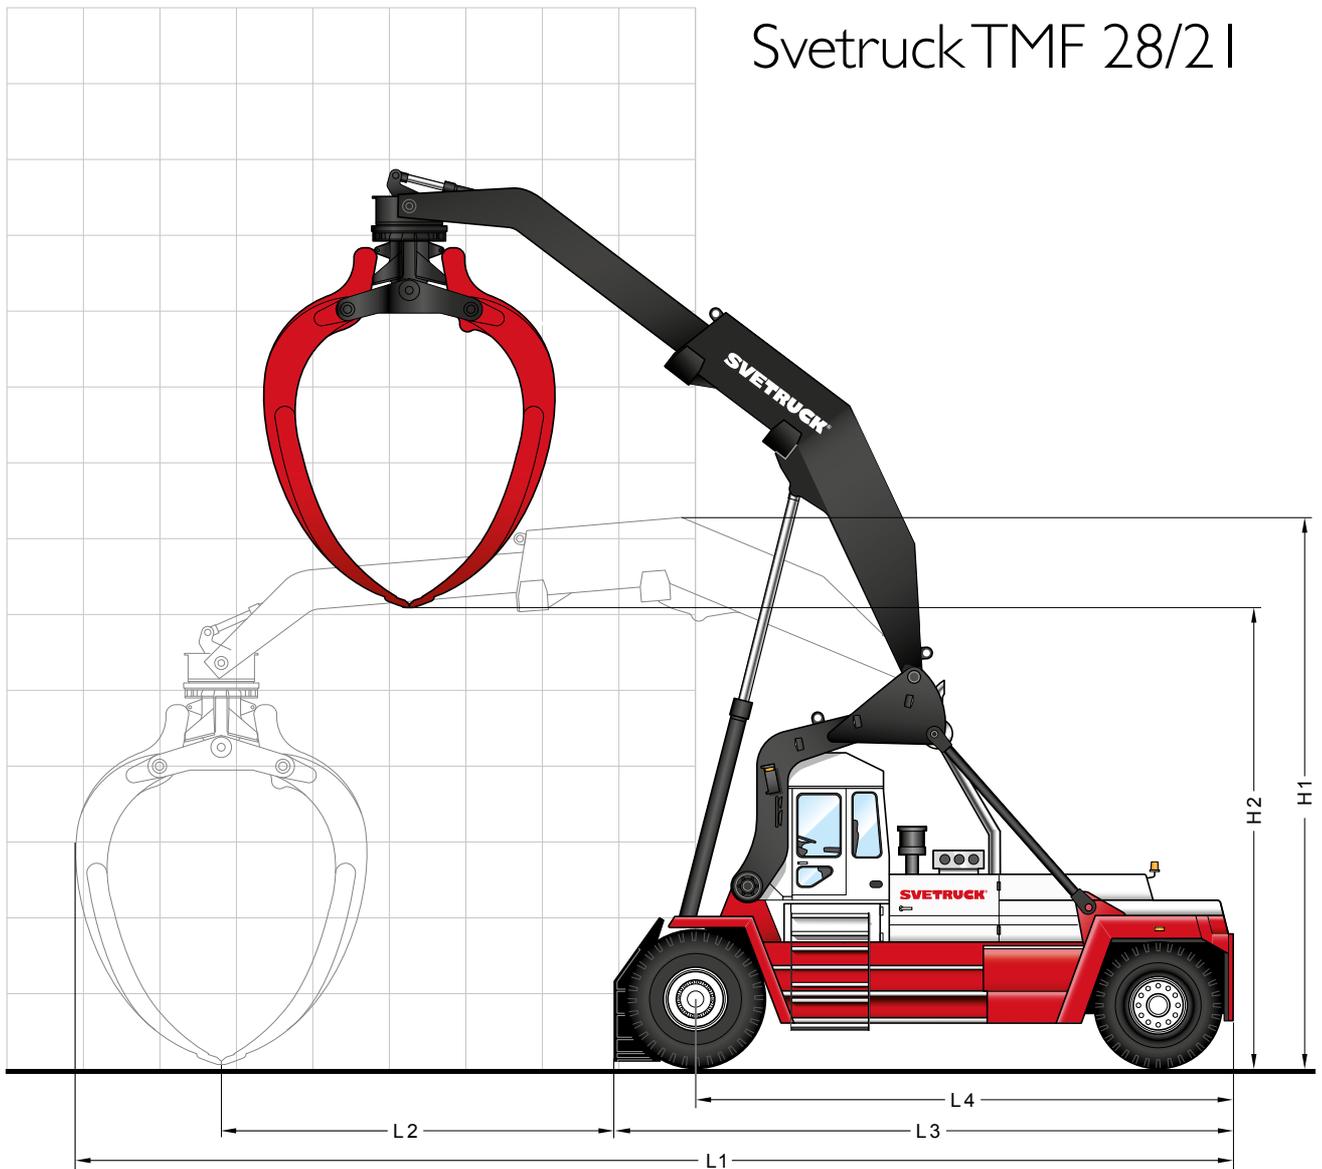

TECHNICAL SPECIFICATIONS

Lift capacity	Telescope retracted.....	28 t
	Telescope extended.....	21 t
Stacking height	Telescope extended, open grapple.....	6500 mm
	Telescope extended, closed grapple.....	6000 mm
Reach	From center of driveaxle, max.....	6100 mm
Grapple	Grapple size, min / max.....	6.0 - 8.2 m ²
	Width, min / max.....	900 - 1340 mm
Dimensions	L1 Telescope extended.....	15000 mm
	L2 Telescope extended.....	5095 mm
	L3.....	8025 mm
	L4.....	6970 mm
	H1.....	7155 mm
	H2, max.....	6000 mm
Total weight	Standard equipped.....	73 000 kg
Tyres	Driveaxle.....	18.00x33"
	Steeraxle.....	18.00x25"
Brakes	Mainbrake.....	Wet disc brakes
	Parking brake.....	Electric spring brake
Speed	Forward / Reverse.....	27 / 27 km/h

Transmission	Type.....	Converter
	Type of gearshift.....	Automatic
	Number of gears, Forward / Reverse.....	3/3
	Model.....	CAT
Engine	Type.....	Volvo 12 litres
	Rating ISO 3046.....	313 kW / 426 hp
	Torque ISO 3046.....	2100 Nm / 1200 rpm
	Stroke / No of cyl.	4 / 6
	Cyl. volume.....	12130 cm ³





Trust. Strength. Performance. True Quality.

SVETRUCK®

Telephone +46 372 866 00 Telefax +46 372 824 50 E-mail info@svetruck.com

Postal address Box 321, SE-341 26 Ljungby, Sweden

Visiting address Långgatan 29, Ljungby, Sweden

www.svetruck.com