


# TECHNICAL DATA

COMBINATION ROLLERS

BW 120 SLC-5



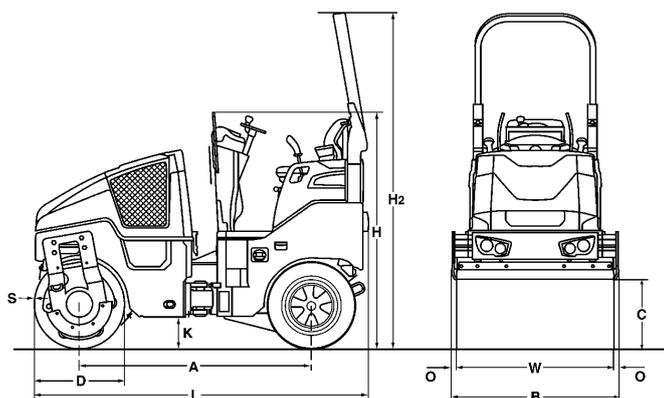

**Dimensions in mm**

	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>H</b>	<b>H2</b>	<b>K</b>	<b>L</b>	<b>O</b>	<b>S</b>	<b>W</b>
<b>BW 120 SLC-5</b>	1752	1272	523	700	1808	2568	254	2529	36	10	1200

**Shipping dimensions in m3**

**BW 120 SLC-5**

**without ROPS**

5,816

**with ROPS**

8,261

<b>Machine type</b>	<b>Compaction output (t/h) at different asphalt layer thicknesses</b>		
	<b>2-4 cm</b>	<b>6-8 cm</b>	<b>10-14 cm</b>
BW 120 SLC-5	20-40	40-60	55-105

## Technical Data

## BOMAG BW 120 SLC-5

### Weights

Operating weight w. ROPS CECE .....	kg	2.250
Axle load, drum / wheels CECE .....	kg	1.150/1.100
Wheel load CECE .....	kg	275
Static linear load, front CECE .....	kg/cm	9,6
Grossweight .....	kg	2.700

### Dimensions

Working width .....	mm	1.200
Track radius, inner .....	mm	

### Driving Characteristics

Speed (1) .....	km/h	0- 5,0
Speed (2) .....	km/h	0- 10,0
Working speed with vibration .....	km/h	0- 10,0
Max. gradeability without/with vibr. ....	%	40/30

### Drive

Engine manufacturer .....		Kubota
Type .....		D 1703
Emission stage .....		Stage V / TIER4f
Cooling .....		water
Number of cylinders .....		3
Performance ISO 14396 .....	kW	18,5
Performance SAE J 1995 .....	hp	25,0
Speed .....	min-1	2.200
Electric equipment .....	V	12
Driven drum .....		standard
Driven wheels .....		4

### Drums and Tyres

Tyre size .....		9.5/65-15
-----------------	--	-----------

### Brakes

Service brake .....		hydrost.
Parking brake .....		hydromec.

### Steering

Steering system .....		oscil.artic.
Steering method .....		hydrost.
Steering / oscillating angle +/- .....	grad	32/10
Crab walk .....	mm	0- 50

### Exciter system

Vibrating drum .....		front
Drive system .....		hydrost.
Frequency .....	Hz	72
Amplitude .....	mm	0,34
Centrifugal force .....	kN	27

### Sprinkler System

Type of sprinkling .....		pressure
--------------------------	--	----------

### Capacities

Fuel .....	l	35,0
Water .....	l	160,0
Emulsion .....	l	45,0

Technical modifications reserved. Machines may be shown with options.

### Standard Equipment

- Four smooth rear rubber wheels
- Hydrostatic travel and vibration drive
- 2 scrapers per drum, spring loaded and tiltable
- Pressure sprinkler system with interval switch
- Multi function travel lever
- Multi-function display incl. operating hour meter
- Water level
- Emergency STOP
- Intelligent Vibration Control (IVC)
- Integrated storage compartment
- Adjustable operator's seat
- Seat contact switch
- Vandalism protection
- 12V socket
- Working lights front and rear
- Back-up alarm
- Lockable engine hood made of composite material
- Lashing eyes, galvanized
- Single point lifting device

### Optional Equipment

- \* Foldable ROPS incl. seat belt
- Sun roof, rigid
- Sun roof, foldable with ROPS
- Weather protection for sun roof
- Seat heating
- Sliding seat incl. double travel lever
- ECONOMIZER with asphalt temperature display
- Temperature display
- BOMAG TELEMATIC
- Indicator and hazard lights
- Rotary beacon
- Optional lighting on ROPS
- Lighting for drum edge
- Battery disconnect switch
- Environmentally compliant hydraulic oil
- Theft protection
- Edge cutter
- Hydraulically adjustable crabwalk (50mm)
- Pointer
- Special painting
- Backup warning buzzer with broadband technology
- ECOSTOP
- Outside mirrors
- Anti-frost intake
- Tablet holder set
- JOBLINK measuring technology interface
- JOBLINK Bluetooth adapter
- BOMAP GPS antenna holder

\* Standard delivery with CE conformity  
(valid within European Union)

