

SVETRUCK®

True Quality

SVETRUCK TMF 32/22 LOGSTACKER



Strength and efficiency in perfect harmony.

The Svetruck TMF is a powerful log stacker, which despite its size is easy to operate and easy to service. The machine has been designed to provide the operator with a good work environment that promotes high production capacity. The overall objective has been for operators to work safely and efficiently throughout the full shift.

The Svetruck TMF is built using well-known quality components and combined with many years of experience and vast know-how, this has resulted in a heavy-duty, highly reliable machine for fast, safe and cost-effective log handling.

► *The Svetruck TMF is the world leader in efficient log handling*

► Optimized log grapple

Grapple sizes available in sizes from 8.0 to 9.5 m². 360° rotation and uncompromised precision during longitudinal turning.

► Comfortable operator environment

A workplace that guarantees the operator a good day at work. Smooth control of all functions, optimum visibility of the working area. EHC controls as standard.



► **Tailored to your work needs**

Upon request, Svetruck can adapt machines to perfectly suit the workplace. The Svetruck TMF machines operate at sawmills, paper mills and in pulp industry settings.

► **Easy access**


The Svetruck TMF is a service-friendly machine with large engine compartment hatches and full access to the reversible hydrostatic fan. Optional boom-mounted service platform.



Log pusher



Engine

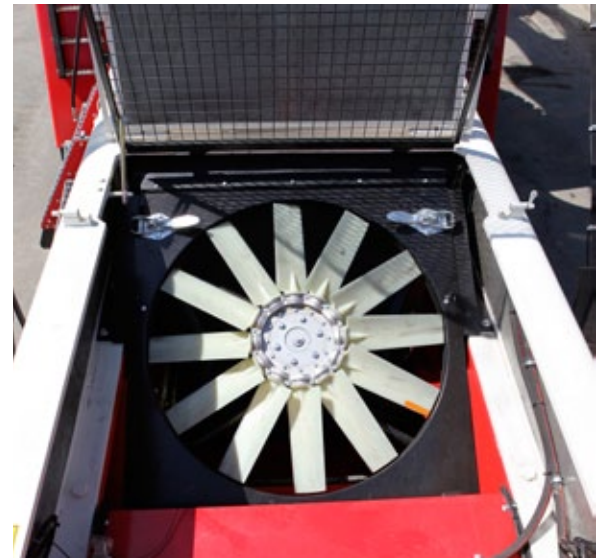

Reversible hydrostatic fan


► **Svetruck D5**

As standard the Svetruck TMF features Svetruck D5 that constitutes a complete control and monitoring system to provide the operator with a full machine status overview.

► **True Quality**

The Svetruck TMF is built using innovative and well-known components. It has been designed and manufactured in our plant in Ljungby, Sweden, relying on over 30 years of truck building experience.

Svetruck TMF 32/22

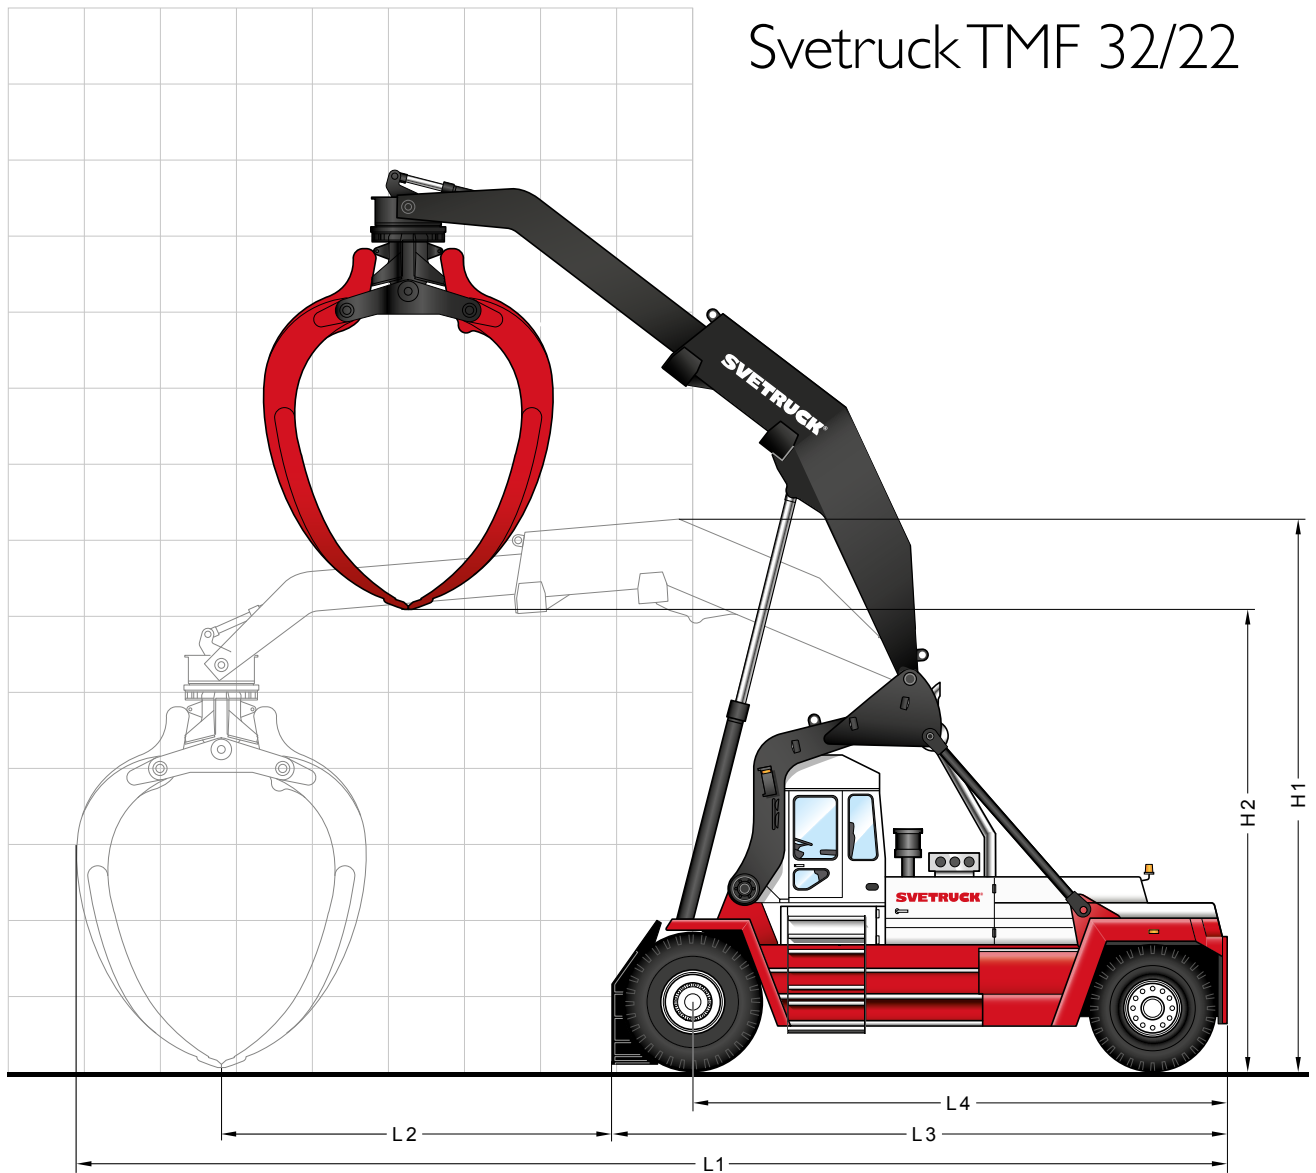

TECHNICAL SPECIFICATIONS

Lifting capacity	Telescope retracted.....	32 t	Speed	Forward / Reverse	27 / 27 km/h
	Telescope extended.....	22 t		Transmission	Type.....
Stacking height	Telescope extended, open grapple	6700 mm	Gearbox.....		Automatic
	Telescope extended, closed grapple.....	6300 mm	Number of gears, Forward / Reverse.....		3/3
Reach	From drive axle centre, max.	6240 mm	Model		CAT
Grapple	Grapple size, min. / max.	8.0 - 9.5 m ²	Engine	Type.....	Cummins 15 litres
	Width.....	1340 mm		Power ISO 3046.....	336 kW / 450 hp
Dimensions	L1 Telescope extended.....	15660 mm		Torque ISO 3046.....	2100 Nm / 1400 rpm
	L2 Telescope extended.....	5100 mm		Stroke/No. of cylinders.....	4 / 6
	L3.....	8450 mm		Cyl. volume.....	15000 cm ³
	L4.....	7370 mm			
	H1.....	7200 mm			
	H2, max.	6300 mm			
Total weight	Standard equipped.....	80000 kg			
Tyres	Drive axle.....	18.00x33"			
	Steering axle.....	18.00x25"			
Brakes	Main brake.....	Wet disc brakes			
	Parking brake.....	Electric spring brake			





Trust. Strength. Performance. True Quality.

SVETRUCK®

Telephone +46 372 866 00 Telefax +46 372 824 50 E-mail info@svetruck.com
Postal address Box 321, SE-341 26 Ljungby, Sweden
Visiting address Långgatan 29, Ljungby, Sweden www.svetruck.com